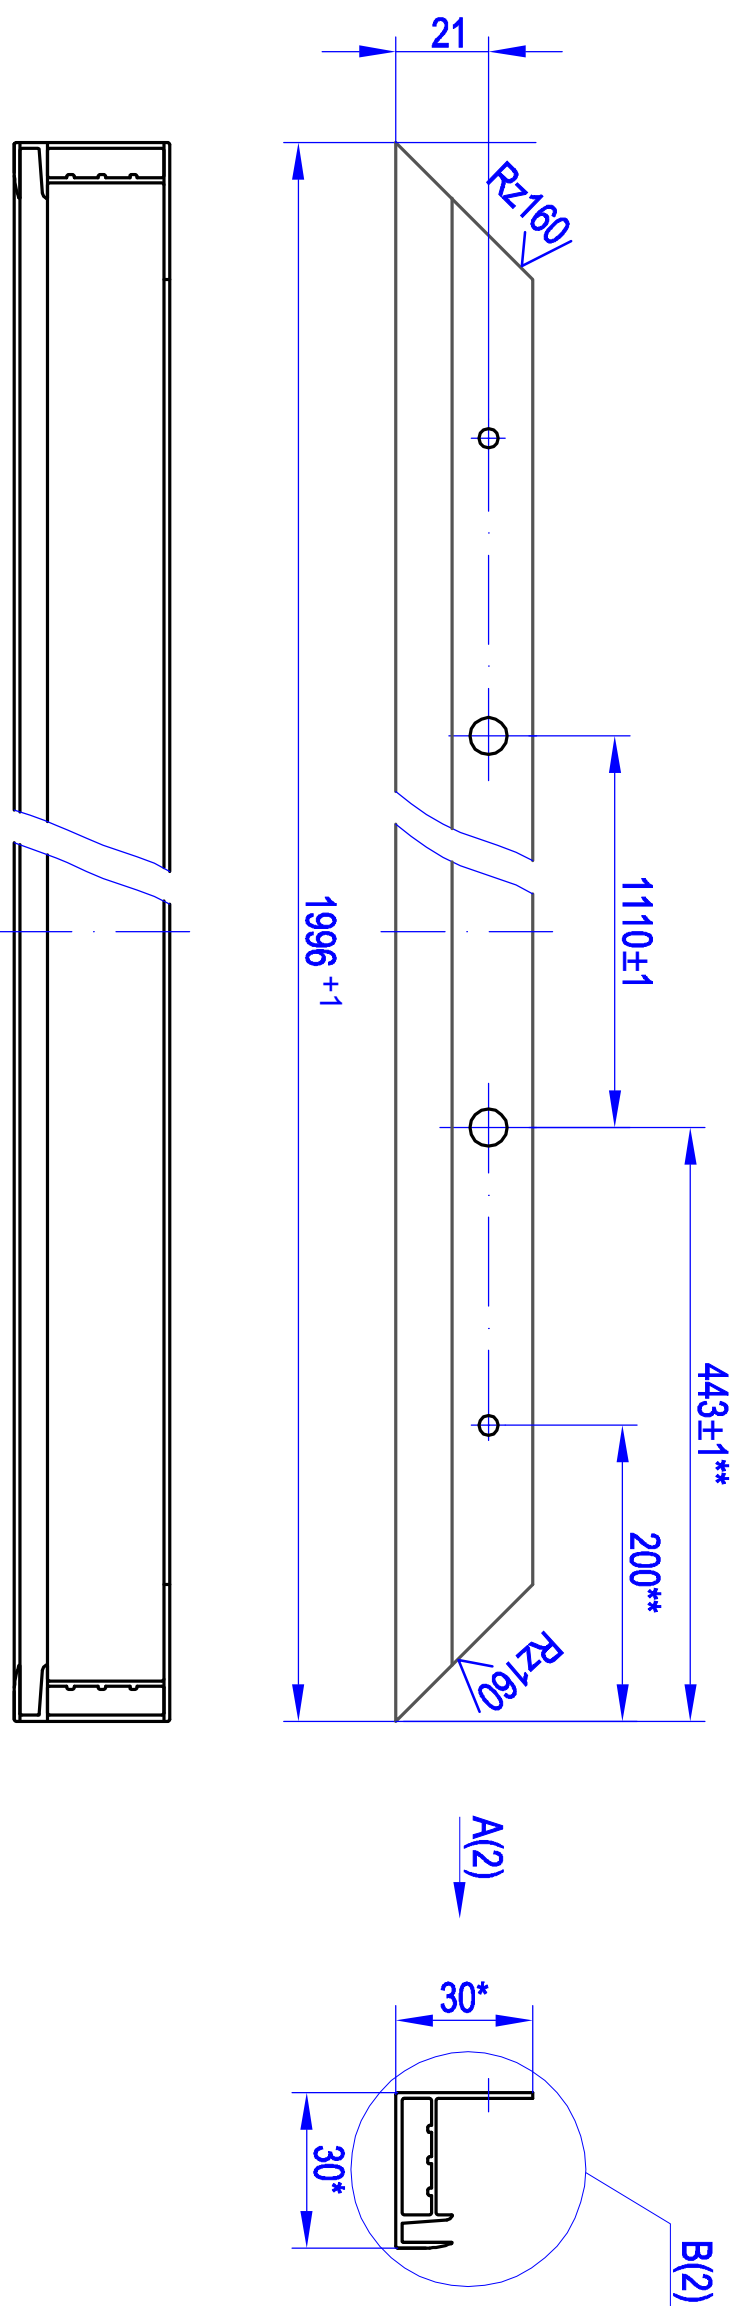


ATMS.746200.023

$$\bigwedge_{\text{Ra } 6,3} (\vee)$$


1. Dimensional tolerances and other technical requirements

are observed as per GOST 22233-2001.

2. Delivery state of T66 – as per GOST 22233–2001.

3. Unstated rounding—off radiuses – 0,5 mm.

4.*Dimensions are secured with tooling.

5.**Dimensional lines start from acute angles.

6.ID-marker – to be chosen by the manufacturer.




7. Wall thickness tolerance for hollow areas $\pm 0,5$ mm.

8. The eathing symbol is to be made through embossment.

9. Coatings: anodized oxydized 20 um as per GOST 22333-200 or powder coated (Interpon D1036) as per GOST 9.410.



[illegible]

Original inv. No.	Signature & date	Instead of (inv.No.)	Copy inv. No.	Signature & date	Reference No.	Primary use

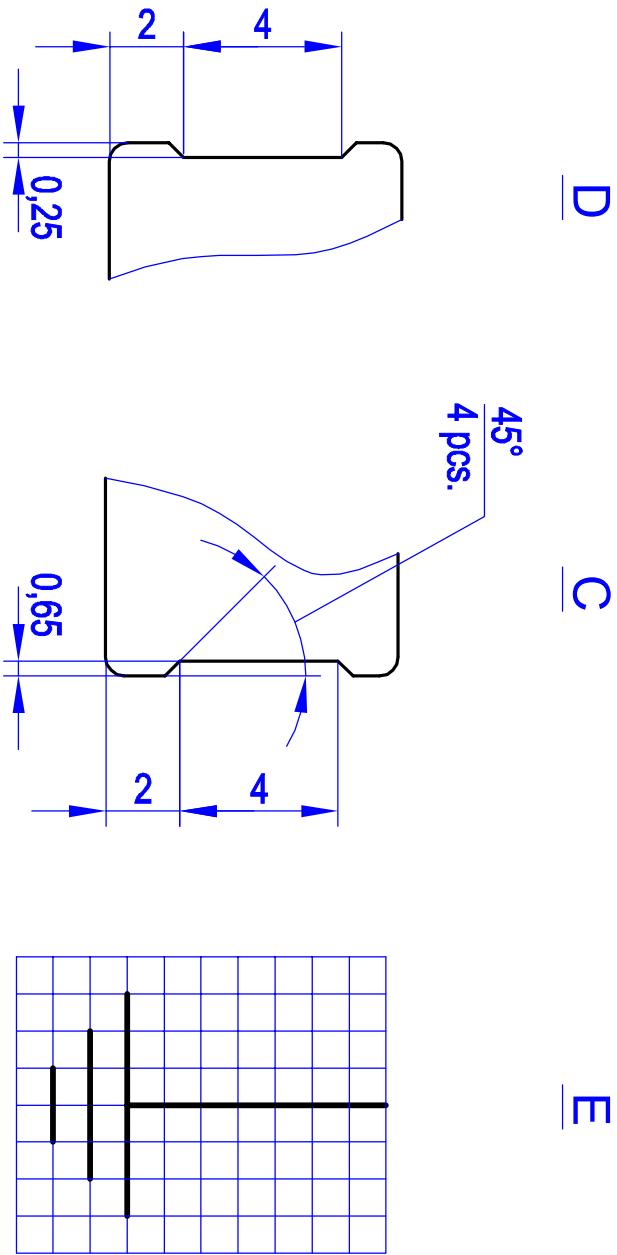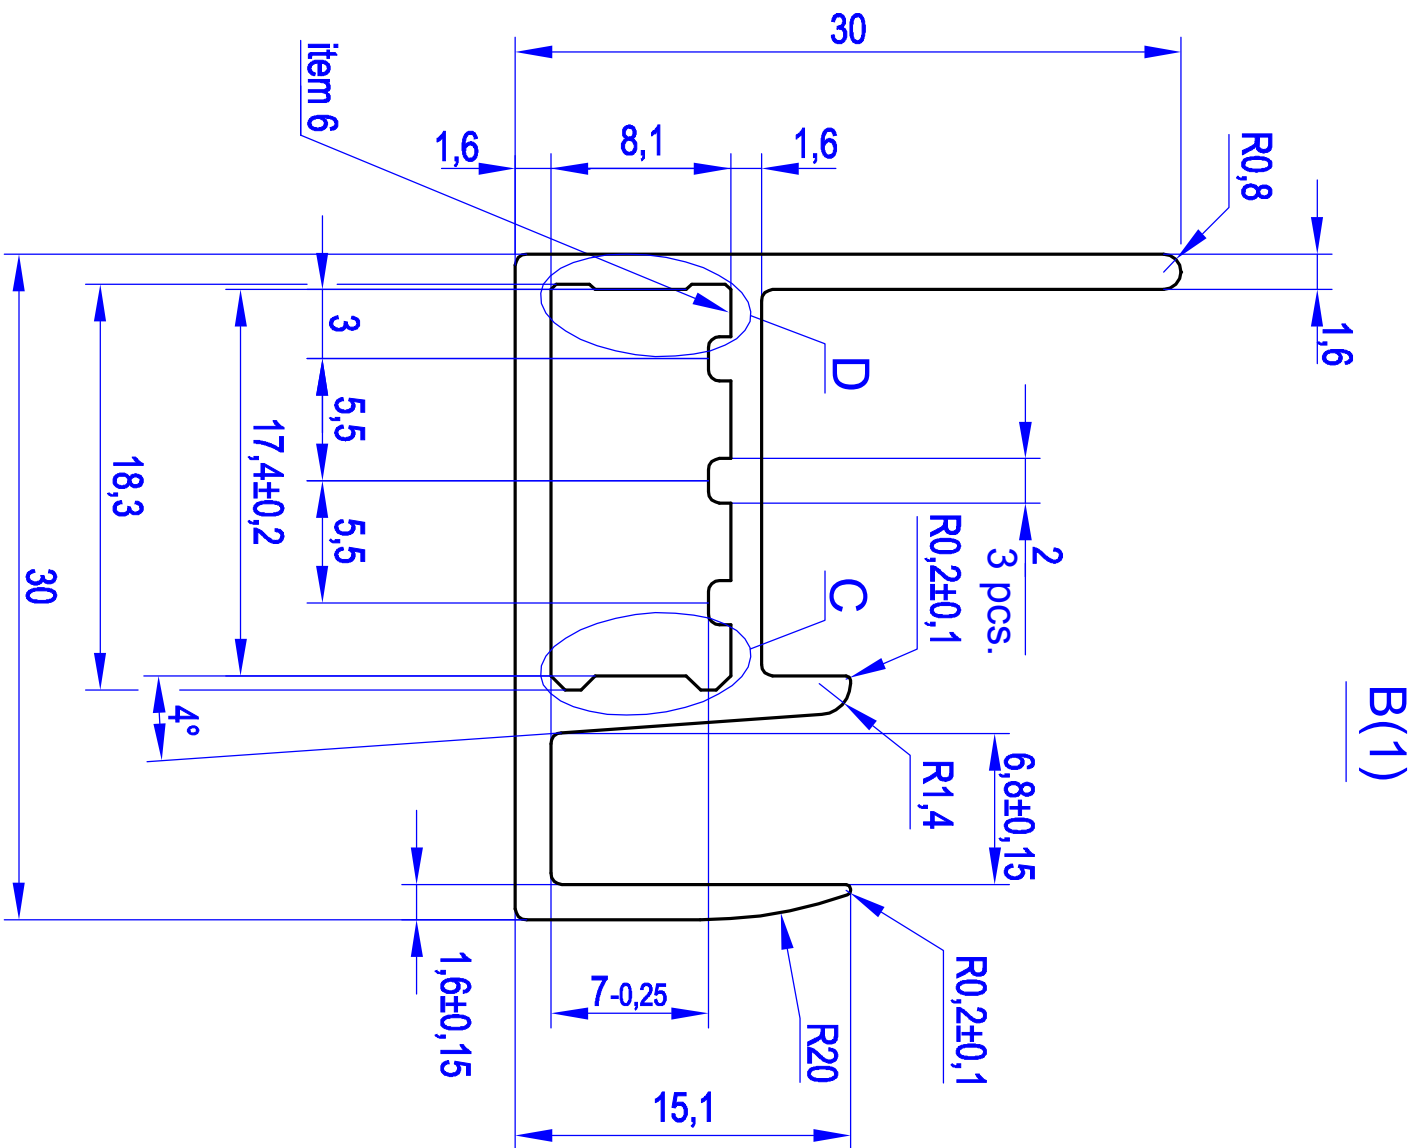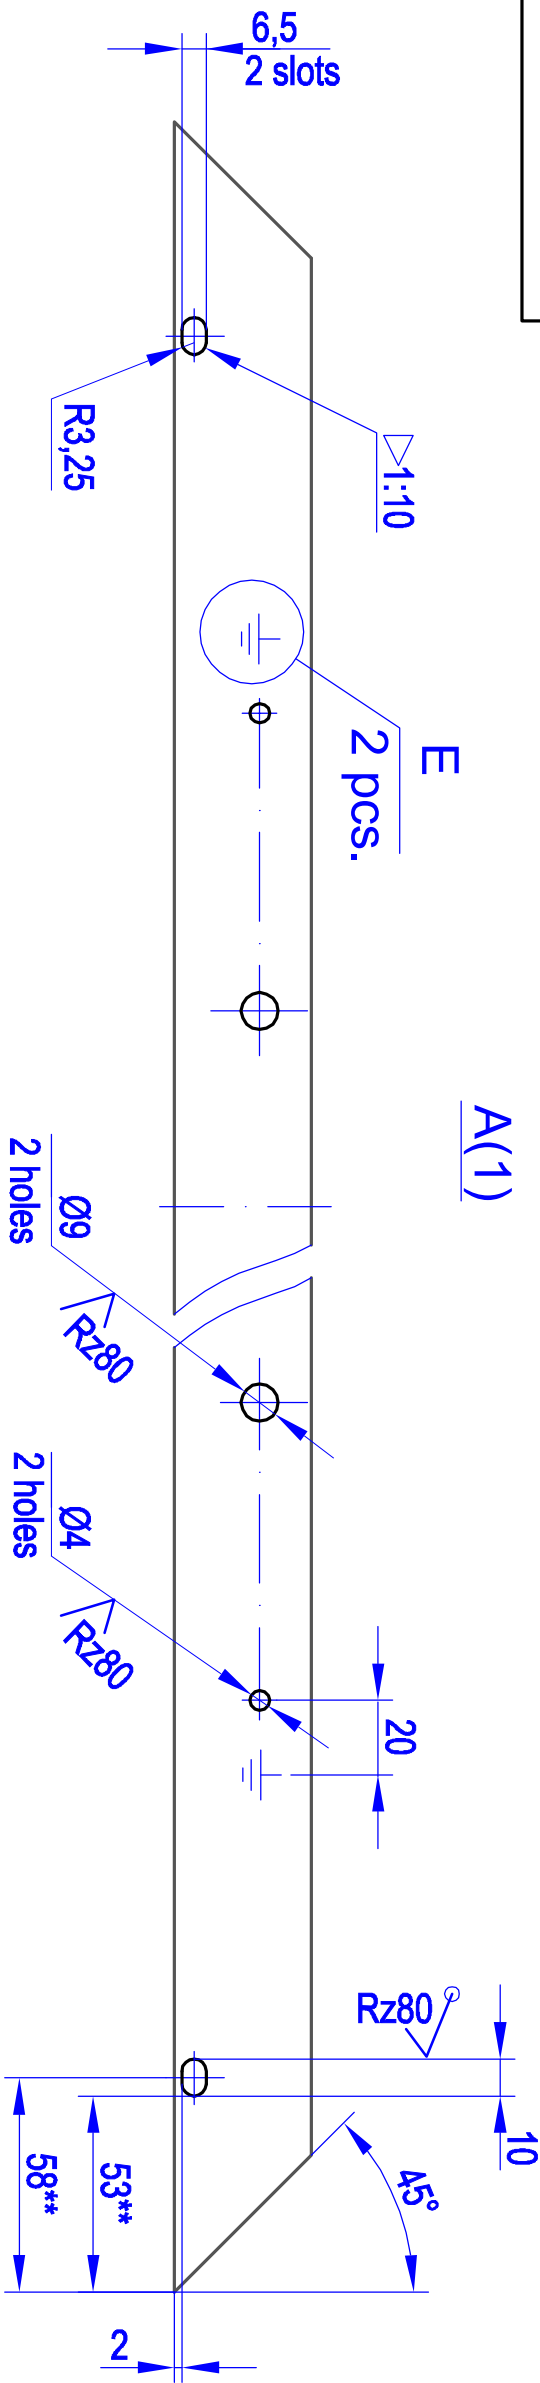

720.002977.SMTA



√ Ra 6,3 (√)

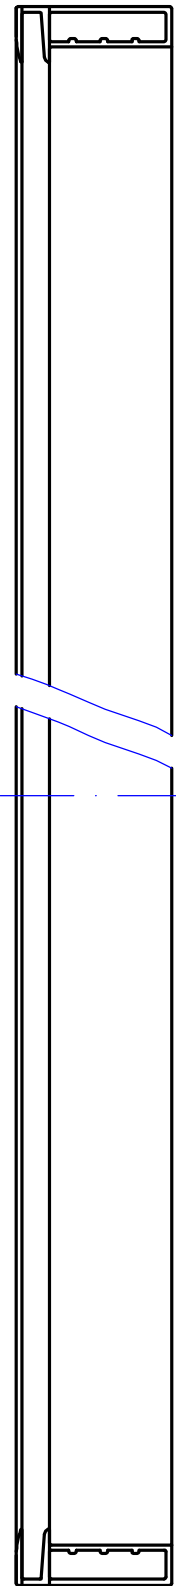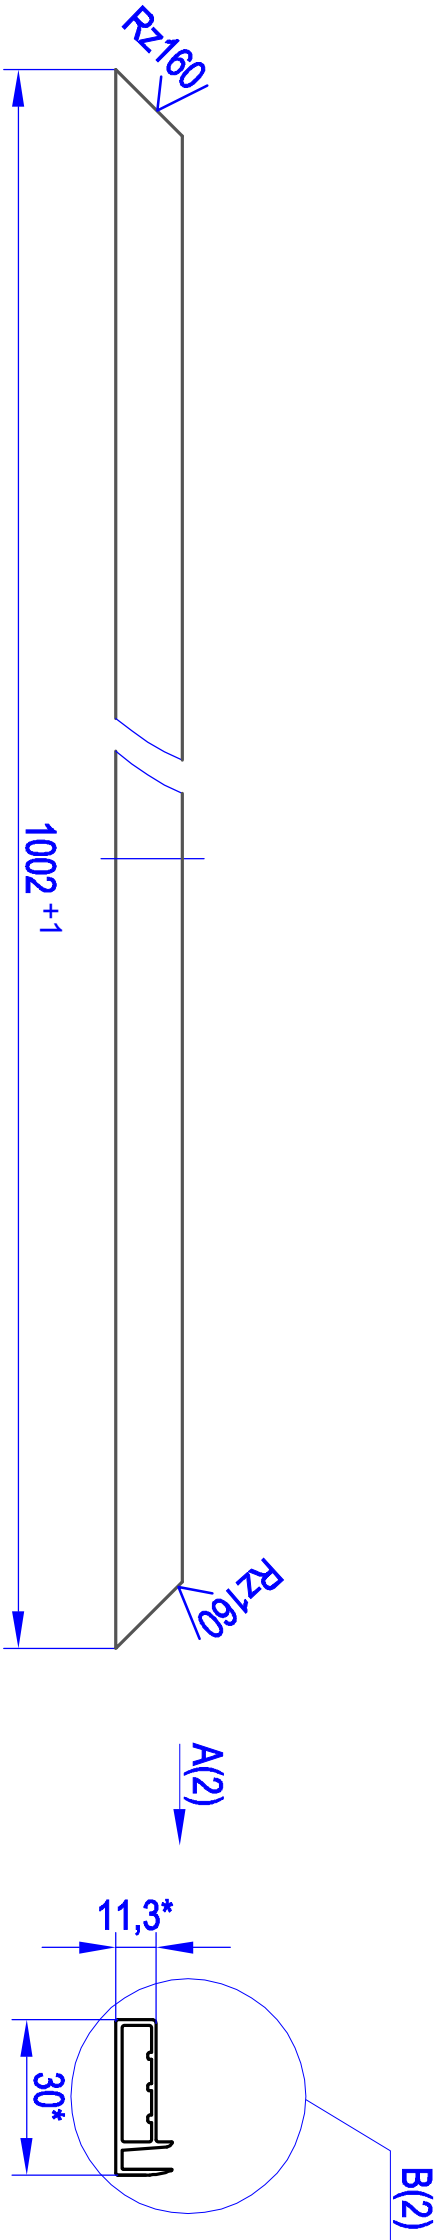

1. Dimensional tolerances and other technical requirements are observed as per GOST 22233–2001.
2. Delivery state of T66 – as per GOST 22233–2001.
3. Unstated rounding–off radiuses – 0,5 mm.
4. *Dimensions are secured with tooling.
5. **Dimensional lines start from acute angles.
6. ID–marker – to be chosen by the manufacturer.
7. Wall thickness tolerance for hollow areas $\pm 0,5$ mm.
8. The eathing symbol is to be made through embossment.
9. Coatings: anodized 20 um as per GOST 22333–200 or powder coated (Interpon D1036) as per GOST 9.410.

Original inv. No.		Signature & date		Instead of (inv.No.)		Copy inv. No.		Signature & date		Reference No.		Primary use	
720.002977.SMTA													
1. Dimensional tolerances and other technical requirements are observed as per GOST 22233–2001. 2. Delivery state of T66 – as per GOST 22233–2001. 3. Unstated rounding–off radiuses – 0,5 mm. 4. *Dimensions are secured with tooling. 5. **Dimensional lines start from acute angles. 6. ID–marker – to be chosen by the manufacturer. 7. Wall thickness tolerance for hollow areas $\pm 0,5$ mm. 8. The eathing symbol is to be made through embossment. 9. Coatings: anodized 20 um as per GOST 22333–200 or powder coated (Interpon D1036) as per GOST 9.410. ATMS.746200.024 Short profile G-G 72 Alloy 6063 DIN 573 Lit. Weight Scale 0₁ 0,36 kg 1:2 Sheet 1 of 2 Hewel, LLC													

ATMS.746200.025
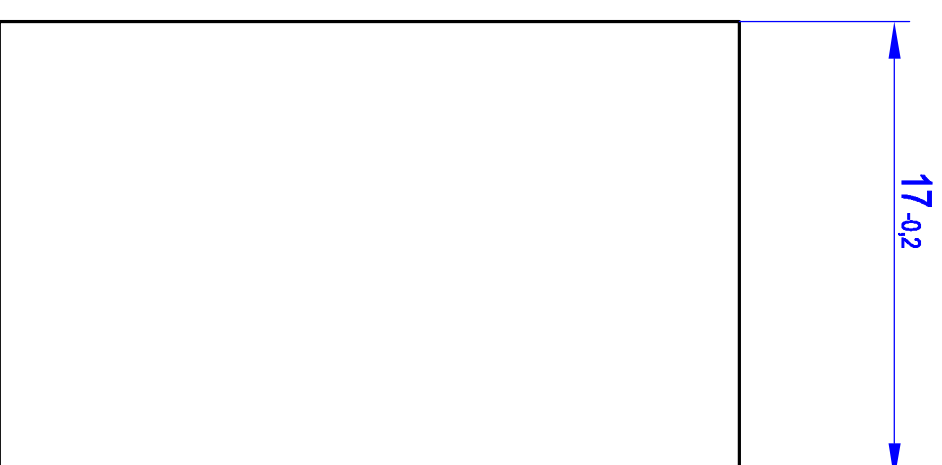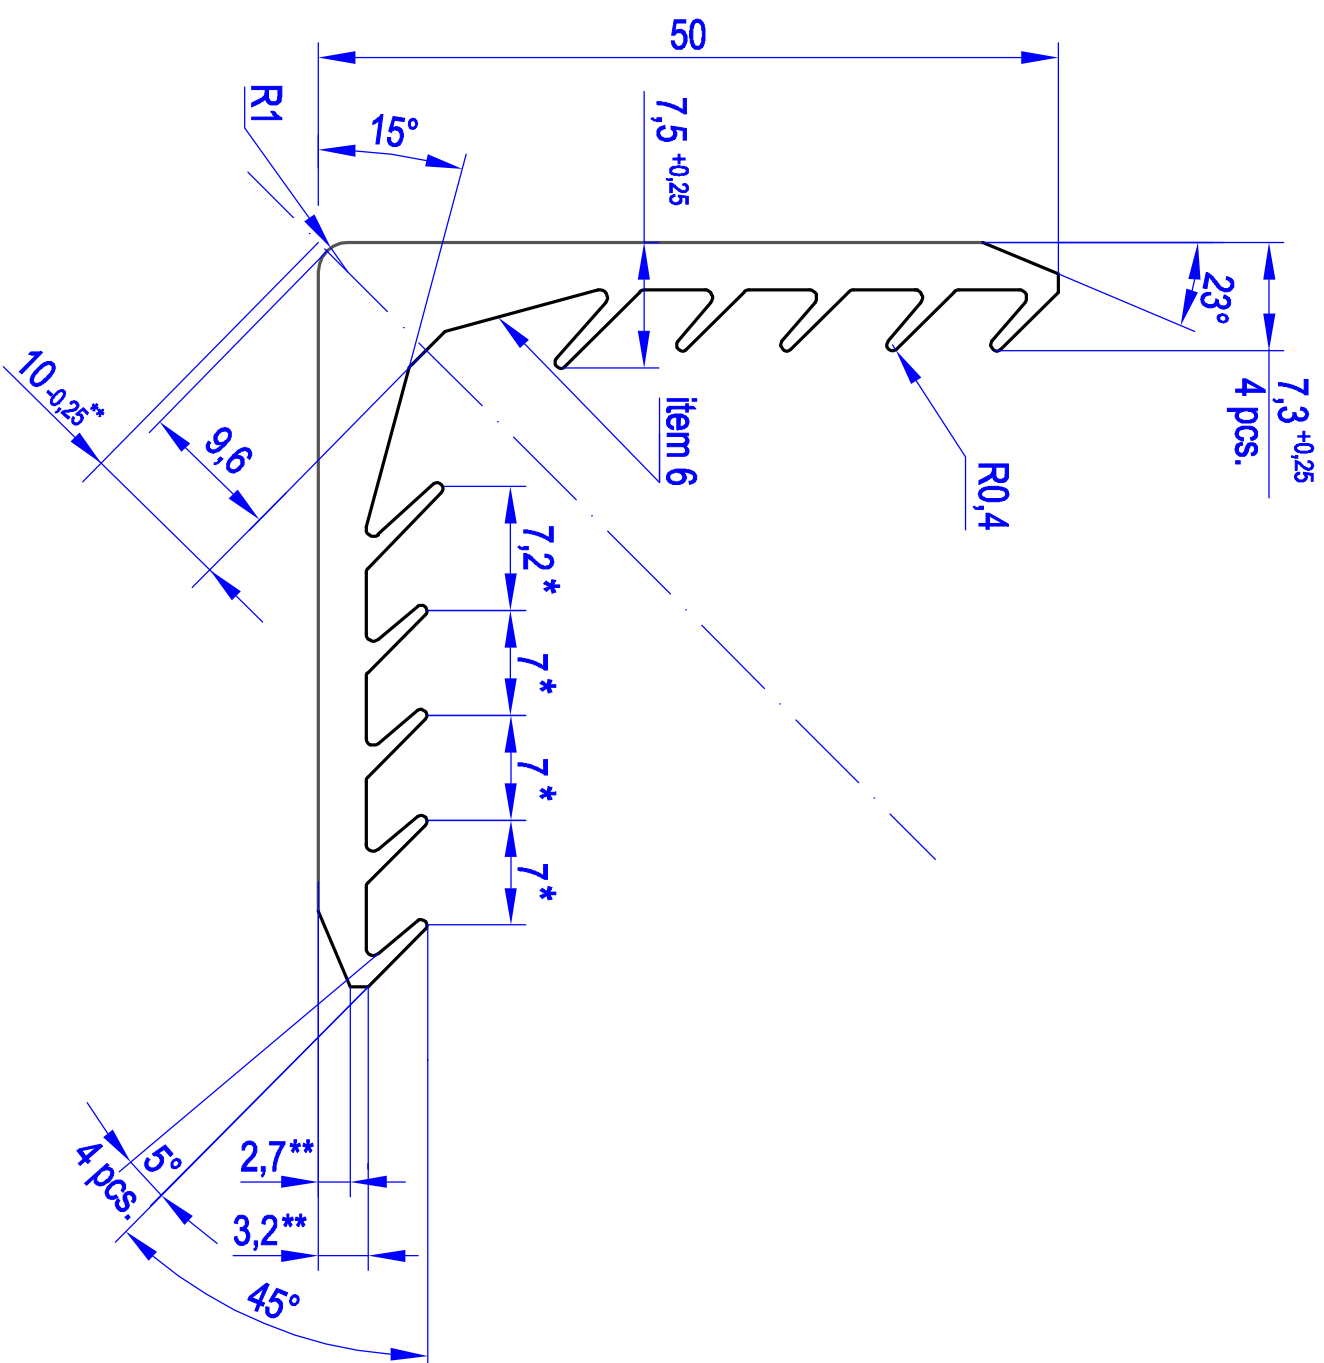
$$\sqrt{Ra_{6,3}(\nabla)}$$


1. Dimensional tolerances and other technical requirements are observed as per GOST 22233–2001.
2. Delivery state of T66 – as per GOST 22233–2001.
3. Unstated rounding–off radiuses – 0,5 mm.
4. *Dimensions are secured with tooling.
5. **Dimensional lines start from acute angles.
6. ID–marker – to be chosen by the manufacturer.
7. Wall thickness tolerance for hollow areas $\pm 0,5$ mm.

[illegible]